



JW5359/JW5359M JW5359F/JW5359FM

18V/2A

Sync. Step-Down Converter

Preliminary Specifications Subject to Change without Notice

DESCRIPTION

The JW[®]5359, JW[®]5359M, JW[®]5359F and JW[®]5359FM are monolithic buck switching regulators based on I2 architecture for fast transient response. Operating with an input range of 4.5V~18V, JW5359, JW5359M, JW5359F and JW5359FM deliver 2A of continuous output current with two integrated N-Channel MOSFETs. The internal synchronous power switches provide high efficiency without the use of an external Schottky diode. At light loads, JW5359 and JW5359M operate in low frequency to maintain high efficiency.

JW5359, JW5359M, JW5359F and JW5359FM guarantee robustness with output short protection, thermal protection, current run-away protection and input under voltage lockout.

JW5359, JW5359M, JW5359F and JW5359FM are available in SOT23-6 package, which provides a compact solution with minimal external components.

Company's Logo is Protected, "JW" and "JOULWATT" are Registered Trademarks of JoulWatt technology Inc.


FEATURES

- 4.5V to 18V operating input range
- 2A output current
- Up to 95% efficiency
- FCCM at light load (JW5359F / JW5359FM)
- PFM at light load (JW5359 / JW5359M)
- 600kHz switching frequency
- Internal soft-start
- Input under-voltage lockout
- Current run-away protection
- Output short protection
- Thermal protection
- Available in SOT23-6 package

APPLICATIONS

- Distributed Power Systems
- Networking Systems
- FPGA, DSP, ASIC Power Supplies
- Green Electronics/ Appliances
- Notebook Computers


TYPICAL APPLICATION

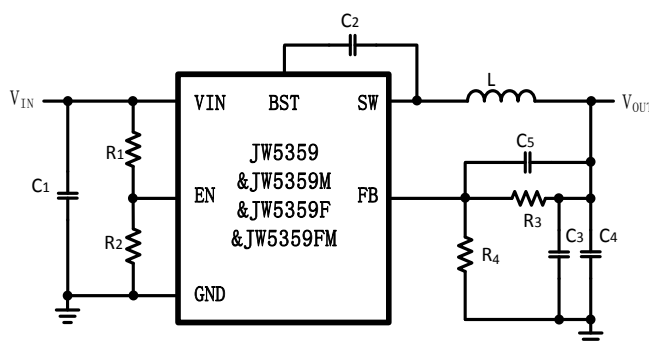

ORDER INFORMATION

DEVICE ¹⁾	PACKAGE	TOP MARKING ²⁾	ENVIRONMENTAL ³⁾
JW5359SOTB#TR	SOT23-6	JWN3□ YW□□□	Green
JW5359MSOTB#TR	SOT23-6	JWN6□ YW□□□	Green
JW5359FSOTB#TR	SOT23-6	JWN4□ YW□□□	Green
JW5359FMSOTB#TR	SOT23-6	JWN7□ YW□□□	Green

Notes:

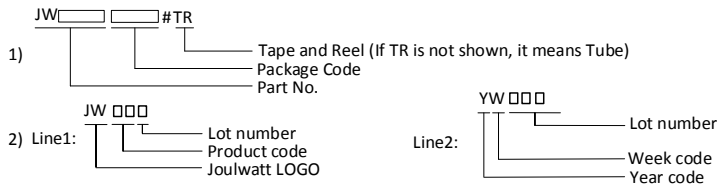


3) All Joulwatt products are packaged with Pb-free and Halogen-free materials and compliant to RoHS standards.

DEVICE INFORMATION

DEVICE	Operation Mode at light load	Function	Package	MSL
JW5359SOTB#TR	PFM	-	SOT23-6	MSL1
JW5359MSOTB#TR	PFM	-	SOT23-6	MSL3
JW5359FSOTB#TR	FCCM	-	SOT23-6	MSL1
JW5359FMSOTB#TR	FCCM	-	SOT23-6	MSL3

PIN CONFIGURATION

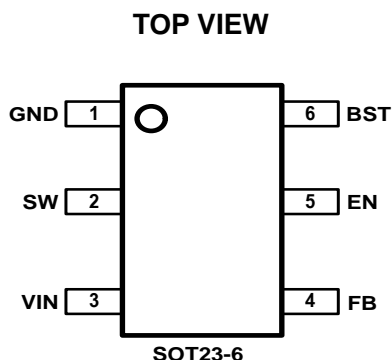

ABSOLUTE MAXIMUM RATING¹⁾

VIN, EN Pin.....	-0.3V to 20V
SW Pin.....	-0.3V(-5V for 10ns) to 20V(22V for 10ns)
BST Pin.....	SW-0.3V to SW+4V
All other Pins	-0.3V to 4V
Junction Temperature ²⁾	150°C
Lead Temperature	260°C
Storage Temperature	-65°C to +150°C

RECOMMENDED OPERATING CONDITIONS

Input Voltage V _{IN}	4.5V to 18V
Output Voltage V _{OUT}	0.765V to V _{IN} *D _{max}
Operation Junction Temperature T _j	-40°C to 125°C

THERMAL PERFORMANCE

	θ_{JA}	θ_{JC}
SOT23-6 ³⁾	220....	130°C/W
SOT23-6 ⁴⁾	100....	25°C/W

Notes:


- 1) Exceeding these ratings may damage the device. These stress ratings do not imply function operation of the device at any other conditions beyond those indicated under RECOMMENDED OPERATING CONDITIONS.
- 2) The JW5359, JW5359M, JW5359F and JW5359FM include thermal protection that is intended to protect the device in overload conditions. Continuous operation over the specified absolute maximum operating junction temperature may damage the device.
- 3) Measured on JESD51-7, 4-layer PCB.
- 4) Measured on a 2OZ two-layer JW5359/JW5359M/JW5359F/JW5359FM Evaluation Board at T_A=25°C.

ELECTRICAL CHARACTERISTICS

$V_{IN}=12V$, $T_A=25^{\circ}C$, Unless otherwise stated.						
Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
V_{IN} Under Voltage Lockout Threshold	V_{IN_MIN}	V_{IN} rising	4.0	4.2	4.5	V
V_{IN} Under voltage Lockout Hysteresis	$V_{IN_MIN_HYST}$			300		mV
Shutdown Supply Current	I_{SD}	$V_{EN}=0V$		0.1	1	μA
Supply Current	I_Q	$V_{EN}=5V$, $V_{FB}=1V$		140	200	μA
Feedback Voltage	V_{FB}	$T_j=25^{\circ}C$	757	765	773	mV
		$T_j=-40^{\circ}C \sim 125^{\circ}C$	750	765	780	mV
FB Leakage Current	I_{FB}	$V_{FB}=0.85V$			100	nA
Top Switch Resistance	$R_{DS(ON)T}$			130		m Ω
Bottom Switch Resistance	$R_{DS(ON)B}$			70		m Ω
Top Switch Leakage Current	I_{LEAK_TOP}	$V_{IN}=18V$, $V_{EN}=0V$, $V_{SW}=0V$		0.1	1	μA
Bottom Switch Leakage Current	I_{LEAK_BOT}	$V_{IN}=18V$, $V_{EN}=0V$, $V_{SW}=18V$		0.1	1	μA
Bottom Switch Current Limit	I_{LIM_BOT}		2	2.5	3.2	A
Negative Current Limit	I_{LIM_Neg}	JW5359F/JW5359FM	-1	-1.3	-1.6	A
Minimum On Time ⁵⁾	T_{ON_MIN}			85		ns
Minimum Off Time	T_{OFF_MIN}	$V_{FB}=0.4V$		150		ns
Maximum On Time	T_{ON_Max}			4		μs
EN Rising Threshold	V_{EN_H}	V_{EN} rising	1.1	1.2	1.3	V
EN Falling Threshold	V_{EN_L}	V_{EN} falling	0.98	1.05	1.12	V
Soft-Start Period ⁵⁾⁶⁾	t_{SS}		0.9	1.3	1.9	ms
Frequency	f_{SW}		480	600	720	kHz
Thermal Shutdown ⁵⁾	T_{TSD}			160		$^{\circ}C$
Thermal Shutdown Hysteresis ⁵⁾	T_{TSD_HYST}			20		$^{\circ}C$

Notes :


- 5) Guaranteed by design.
 6) Soft-Start Period is tested from 10% to 90% of the steady state output voltage.

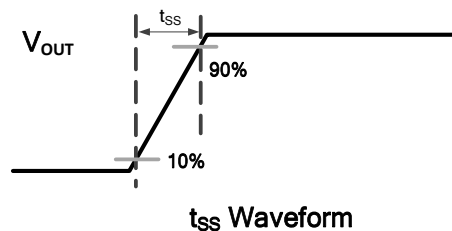

PIN DESCRIPTION

SOT23-6	Name	Description
1	GND	Ground pin.
2	SW	SW is the switching node that supplies power to the output. Connect the output LC filter from SW to the output load.
3	VIN	Input voltage pin. VIN supplies power to the IC. Connect a 4.5V to 18V supply to VIN and bypass VIN to GND with a suitably large capacitor to eliminate noise on the input to the IC.
4	FB	Output feedback pin. FB senses the output voltage and is regulated by the control loop to 0.765V. Connect a resistive divider at FB.
5	EN	Drive EN pin high to turn on the regulator and low to turn off the regulator.
6	BST	Connect a 0.1μF capacitor between BST and SW pin to supply voltage for the top switch driver.

BLOCK DIAGRAM

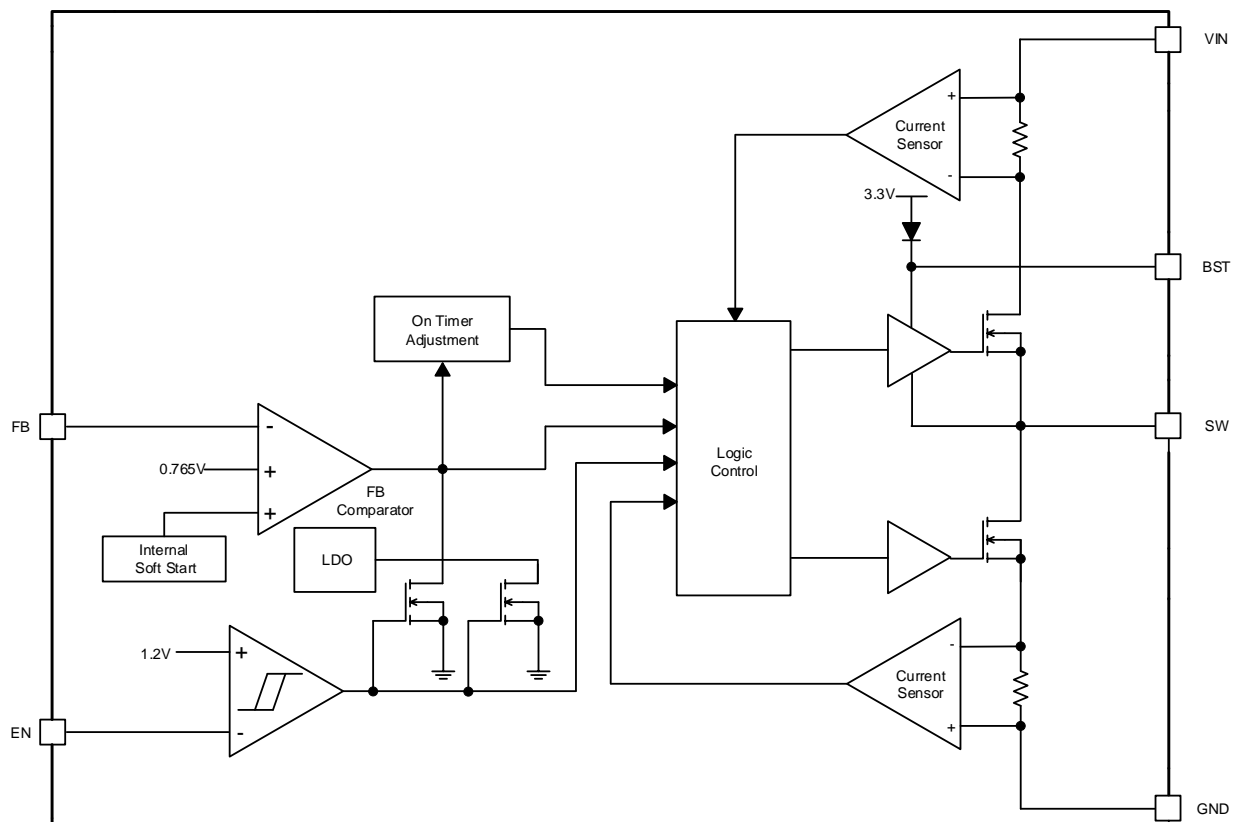


TYPICAL PERFORMANCE CHARACTERISTICS (JW5359/JW5359M)

$V_{IN}=12V$, $V_{OUT}=3.3V$, $L=3.3\mu H$, $C_{OUT}=22\mu F$, $T_A=+25^{\circ}C$, unless otherwise noted

Steady State Test


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=2A$

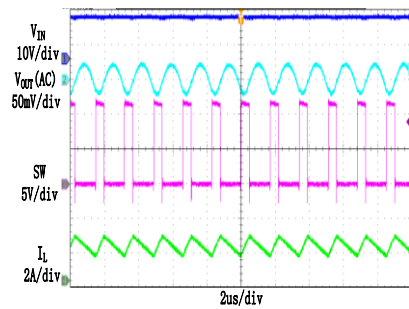**Startup through Enable**


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=2A$ (Resistive load)

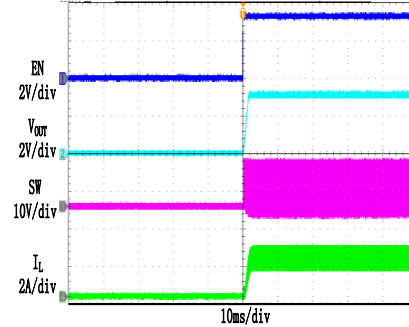
**Shutdown through Enable**

$V_{IN}=12V$, $V_{OUT}=3.3V$


$I_{OUT}=2A$ (Resistive load)

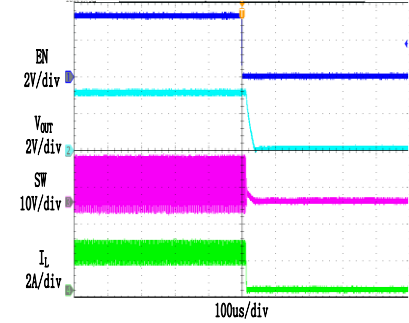**Heavy Load Operation**


2A LOAD

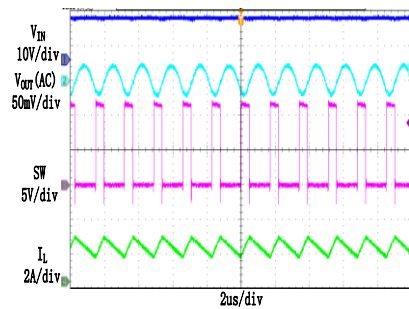**Medium Load Operation**

0.2A LOAD

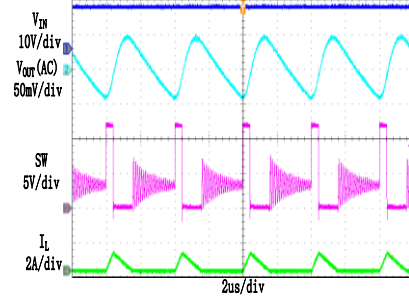
**Light Load Operation**

0A LOAD

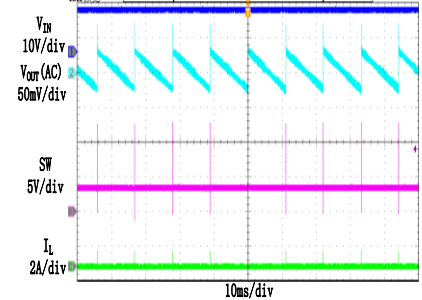**Short Circuit Protection**


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=2A$ - Short

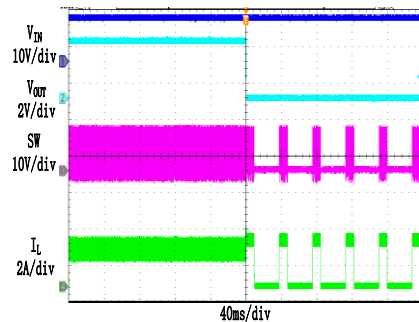**Short Circuit Recovery**


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=$ Short-2A

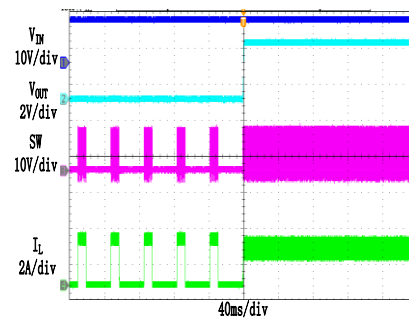**Load Transient**

$C_5=51pF$

0.2A LOAD \rightarrow 2A LOAD \rightarrow 0.2A LOAD

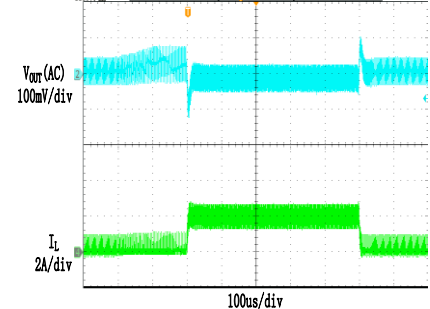

TYPICAL PERFORMANCE CHARACTERISTICS (JW5359/JW5359M)

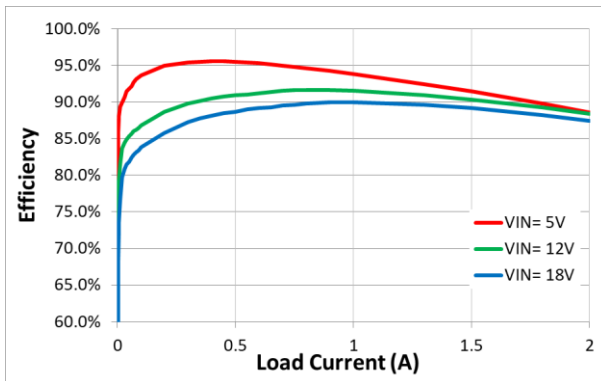


Figure 1. Efficiency vs. Load Current
($V_{OUT}=3.3V$, $L=3.3\mu H$)

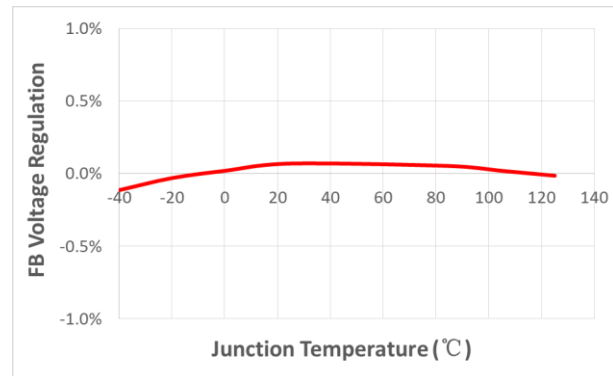


Figure 2. FB Voltage Regulation vs Junction Temperature

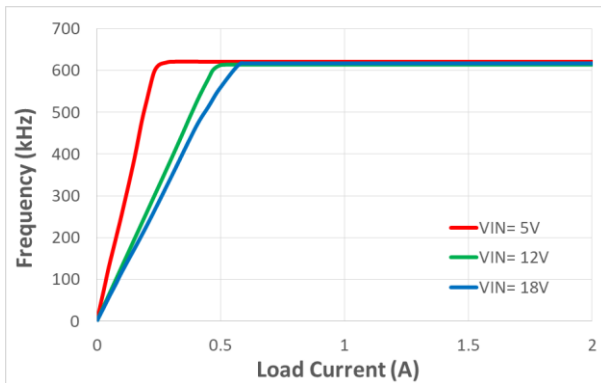


Figure 3. Frequency vs Load Current
($V_{OUT}=3.3V$, $L=3.3\mu H$)

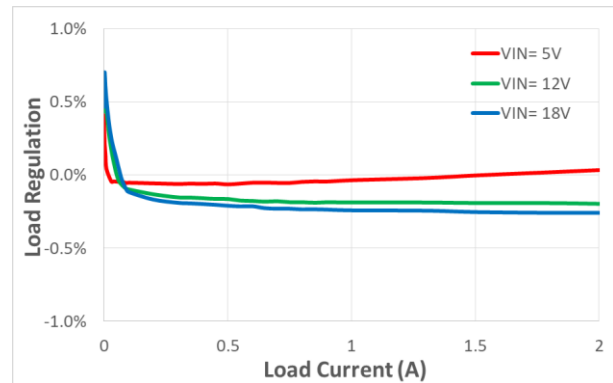


Figure 4. Load Regulation vs Load Current
($V_{OUT}=3.3V$, $L=3.3\mu H$)

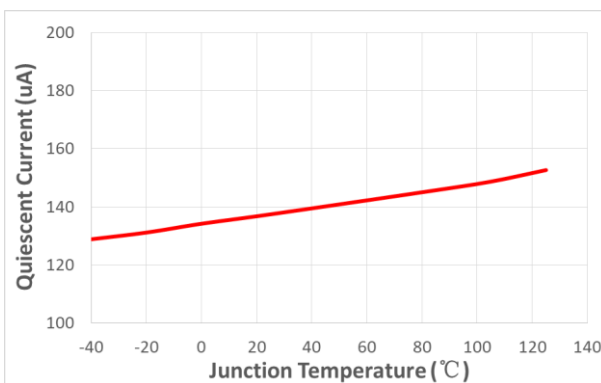


Figure 5. Supply Current vs Junction Temperature

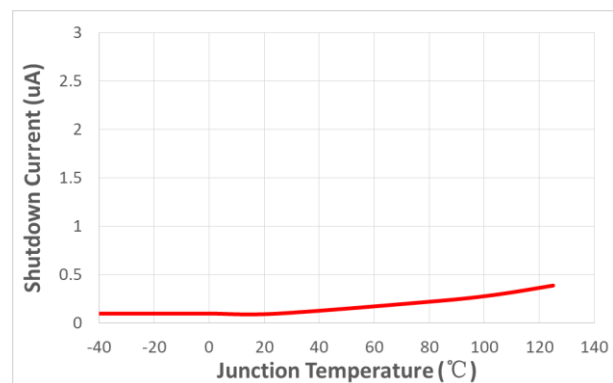


Figure 6. Shutdown Current vs Junction Temperature


TYPICAL PERFORMANCE CHARACTERISTICS (JW5359F/JW5359FM)

$V_{IN}=12V$, $V_{OUT}=3.3V$, $L=3.3\mu H$, $C_{OUT}=22\mu F$, $T_A=+25^{\circ}C$, unless otherwise noted

Steady State Test


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=2A$

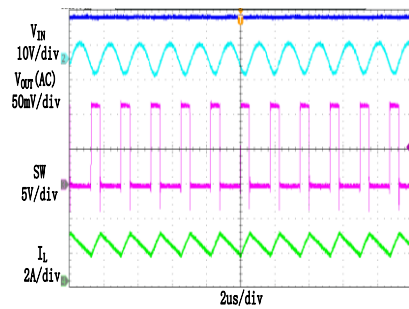**Startup through Enable**


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=2A$ (Resistive load)

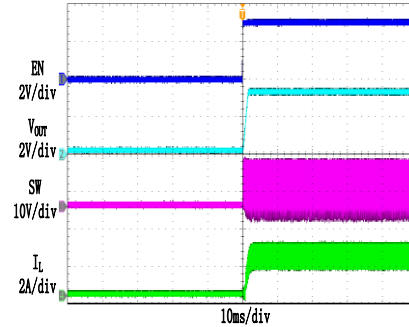
**Shutdown through Enable**

$V_{IN}=12V$, $V_{OUT}=3.3V$


$I_{OUT}=2A$ (Resistive load)

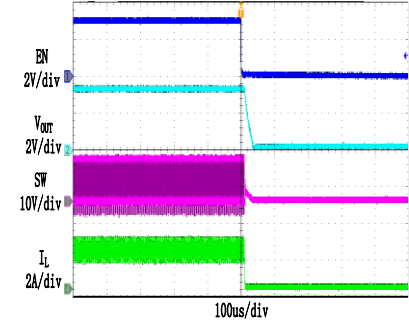**Heavy Load Operation**


2A LOAD

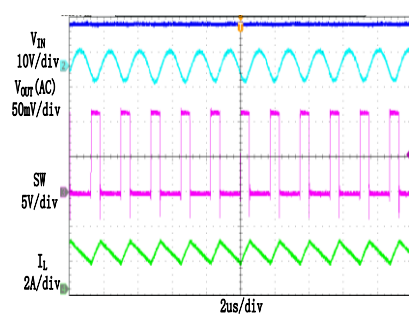**Medium Load Operation**

0.2A LOAD

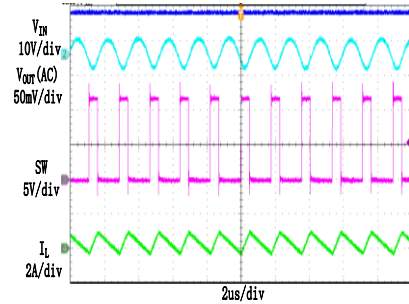
**Light Load Operation**

0A LOAD

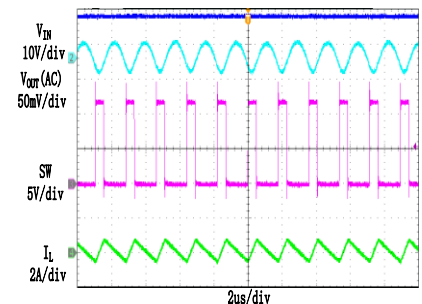**Short Circuit Protection**


$V_{IN}=12V$, $V_{OUT}=3.3V$

$I_{OUT}=2A$ - Short

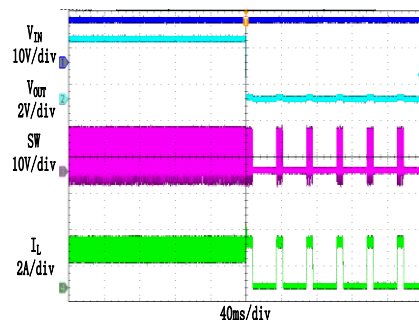**Short Circuit Recovery**


$V_{IN}=12V$, $V_{OUT}=3.3V$

I_{OUT} = Short-2A

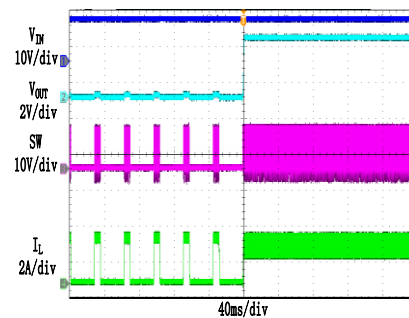**Load Transient**

$C_5=51pF$

0.2A LOAD \rightarrow 2A LOAD \rightarrow 0.2A LOAD

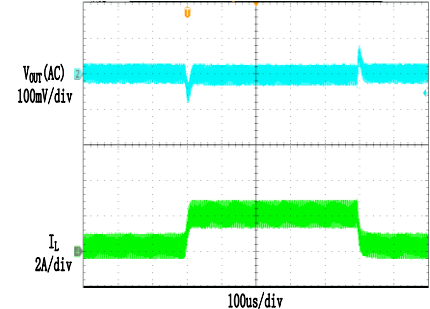

TYPICAL PERFORMANCE CHARACTERISTICS (JW5359F/JW5359FM)

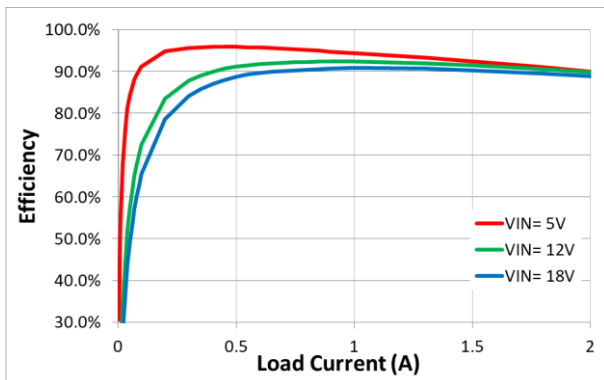


Figure 7. Efficiency vs. Load Current
($V_{OUT}=3.3V$, $L=3.3\mu H$)

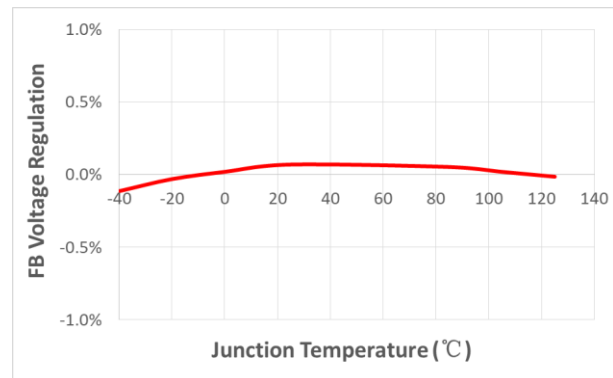


Figure 8. FB Voltage Regulation vs. Junction Temperature

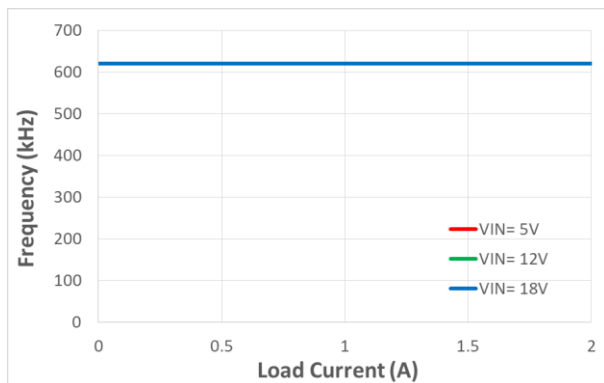


Figure 9. Frequency vs. Load Current
($V_{OUT}=3.3V$, $L=3.3\mu H$)

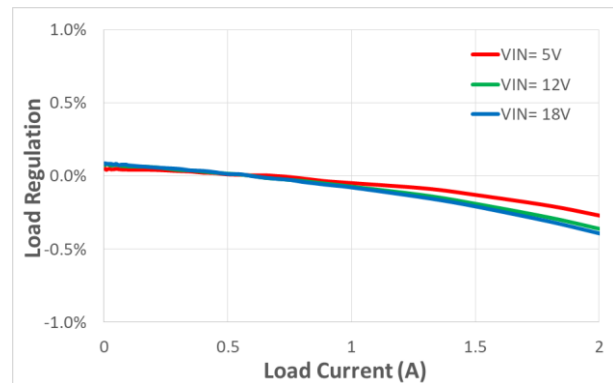


Figure 10. Load Regulation vs. Load Current
($V_{OUT}=3.3V$, $L=3.3\mu H$)

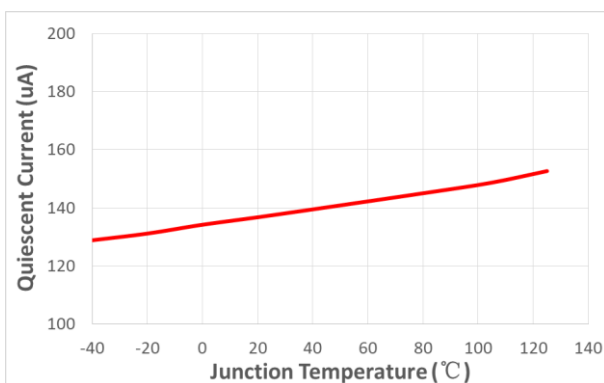


Figure 11. Supply Current vs. Junction Temperature

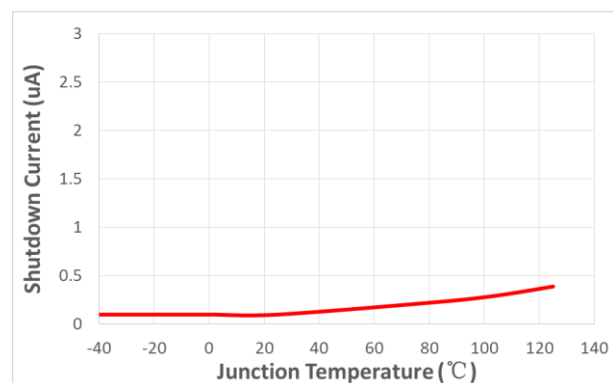


Figure 12. Shutdown Current vs. Junction Temperature

FUNCTIONAL DESCRIPTION

JW5359, JW5359M, JW5359F and JW5359FM are synchronous step-down regulators based on I2 control architecture. It regulates input voltages from 4.5V to 18V down to an output voltage as low as 0.765V, and is capable of supplying up to 2A of load current.

Shut-Down Mode

The regulator shuts down when voltage at EN pin is driven below 0.4V. The entire regulator is off and the supply current consumed by the regulator drops below 1 μ A.

Power Switch

N-Channel MOSFET switches are integrated on the JW5359, JW5359M, JW5359F and JW5359FM to down convert the input voltage to the regulated output voltage. Since the top MOSFET needs a gate voltage great than the input voltage, a boost capacitor connected between BST and SW pins is required to drive the gate of the top switch. The boost capacitor is charged by the internal 3.3V rail when SW is low.

CCM Operation

Continuous conduction mode (CCM) occurs when the output current is high, and the inductor current is always above zero amps.

JW5359F and JW5359FM are configured to operate in forced CCM operation (FCCM) when the output current is low. In FCCM operation, the switching frequency is fairly constant; hence the output ripple keeps almost the same throughout the whole load range.

PFM Operation

At light load condition, JW5359 and JW5359M are configured to work in PFM mode to optimize

the efficiency. When the load decreases, the inductor current will decrease as well. Once the inductor current reaches zero, the part transitions from CCM to PFM mode.

In PFM operation, the high side MOSFET is turned off by the peak current reference and the low side MOSFET turns on until the inductor current reaches zero. At this time, the output voltage is still higher than the target value which causes the internal COMP voltage lower than a clamp value, and the high side MOSFET is not allowed to turn on until the COMP voltage rises above its clamp voltage.

V_{IN} Under-Voltage Protection

A resistive divider can be connected between V_{IN} and ground, with the central tap connected to EN, so that when V_{IN} drops to the pre-set value, EN drops below 1.05V to trigger input under voltage lockout protection.

Output Current Run-Away Protection

At start-up, due to the high voltage at input and low voltage at output, current inertia of the output inductor can be easily built up, resulting in a large start-up output current. A valley current limit is designed in JW5359, JW5359M, JW5359F and JW5359FM so that only when output current drops below the valley current limit can the top power switch be turned on. By such control mechanism, the output current at start-up is well controlled.

Output Short Protection

When the output is shorted to ground, the regulator is allowed to switch for 2048 cycles. If the short condition is cleared within this period, then the regulator resumes normal operation. If the short condition is still present after 2048

switching cycles, then no switching is allowed and the regulator enters hiccup mode for 6144 cycles. After the 6144 hiccup cycles, the regulator will try to start-up again. If the short condition still exists after 2048 cycles of switching, the regulator enters hiccup mode. This process of start-up and hiccup iterate itself until the short condition is removed.

Thermal Protection

When the temperature of the regulator rises above 160°C, it is forced into thermal shut-down. Only when core temperature drops below 140°C can the regulator become active again.

APPLICATION INFORMATION

Output Voltage Set

The output voltage is determined by the resistor divider connected at the FB pin, and the voltage ratio is:

$$V_{FB} = V_{OUT} \cdot \frac{R_4}{R_4 + R_3}$$


where V_{FB} is the feedback voltage and V_{OUT} is the output voltage.

Choose R_4 around 16k Ω , and then R_3 can be calculated by:

$$R_3 = R_4 \cdot \left(\frac{V_{OUT}}{0.765} - 1 \right)$$

The following table lists the recommended values.

$V_{OUT}(V)$	$R_4(k\Omega)$	$R_3(k\Omega)$
0.8	16	0.73
1	16	4.9
1.2	16	9.1
1.8	16	21.6
2.5	16	36.3
3.3	16	53
5	16	88.6



Feedforward Capacitor

In order to improve dynamic performance, a feedforward capacitor (C_5) can be considered to be in parallel with R_3 .

Input Capacitor

The input capacitor is used to supply the AC

input current to the step-down converter and maintain the DC input voltage. Estimate the RMS current in the input capacitor with:

$$I_{C1} = I_{LOAD} \cdot \sqrt{\frac{V_{OUT}}{V_{IN}} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}} \right)}$$

where I_{LOAD} is the load current, V_{OUT} is the output voltage, V_{IN} is the input voltage.

The input capacitor can be calculated by the following equation when the input ripple voltage is determined.

$$C_1 = \frac{I_{LOAD}}{f_s \cdot \Delta V_{IN}} \cdot \frac{V_{OUT}}{V_{IN}} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}} \right)$$

where C_1 is the input capacitance value, f_s is the switching frequency, ΔV_{IN} is the input ripple voltage.

The input capacitor can be electrolytic, tantalum or ceramic. To minimize the potential noise, a small X5R or X7R ceramic capacitor, e.g. 0.1 μ F, should be placed as close to the IC as possible when using electrolytic capacitors.

A 22 μ F/25V ceramic capacitor is recommended in typical application.

Output Capacitor

The output capacitor is required to maintain the DC output voltage, and the capacitance value determines the output ripple voltage. The output voltage ripple can be calculated by:


$$\Delta V_{OUT} = \frac{V_{OUT}}{f_s \cdot L} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}} \right) \cdot \left(R_{ESR} + \frac{1}{8 \cdot f_s \cdot C_{OUT}} \right)$$

where C_{OUT} is the output capacitance value and R_{ESR} is the equivalent series resistance value of the output capacitor.

The output capacitor can be low ESR electrolytic, tantalum or ceramic, and lower ESR

REFERENCE DESIGN

Reference 1:

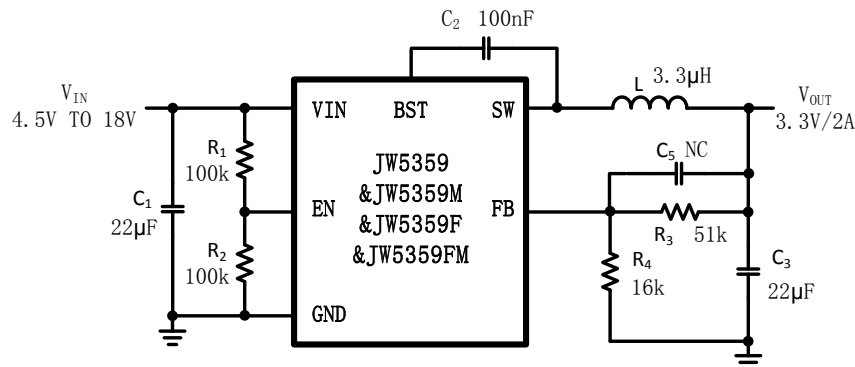
 V_{IN} : 4.5V~18V V_{OUT} : 3.3V I_{LOAD} : 0~2AExternal Components Suggestion ($V_{IN}=12V$):

$V_{OUT}(V)$	$R_4 (k\Omega)$	$R_3 (k\Omega)$	$C_5 (pF)$	$L (\mu H)$	$C_{3_MIN} (\mu F)$	$C_{3_EFF} (\mu F)$
0.8	16	0.73	NC	1.5	44	30
1	16	4.9	NC	2.2	44	30
1.2	16	9.1	NC	2.2	44	30
1.8	16	21.6	NC	3.3	32	20
2.5	16	36.3	NC	3.3	22	10
3.3	16	53	NC	3.3	22	10
5	16	88.6	NC	4.7	22	10

Notes:


- 1) In order to improve dynamic performance, a feedforward capacitor (C_5) can be considered to be in parallel with R_3 .
- 2) Capacitor tolerance and bias voltage de-rating should be considered. The effective capacitance can vary by +20% and -80%. Please refer to the datasheet of capacitor.
- 3) C_{3_MIN} is the minimum nominal capacitance value of C_3 (output capacitance). C_{3_EFF} is the minimum effective capacitance value of C_3 .
- 4) Joulwatt's customers are responsible for determining suitability of components chosen for their purposes. Customers should validate their design implementation to make sure the proper system functionality.

TAPE AND REEL INFORMATION

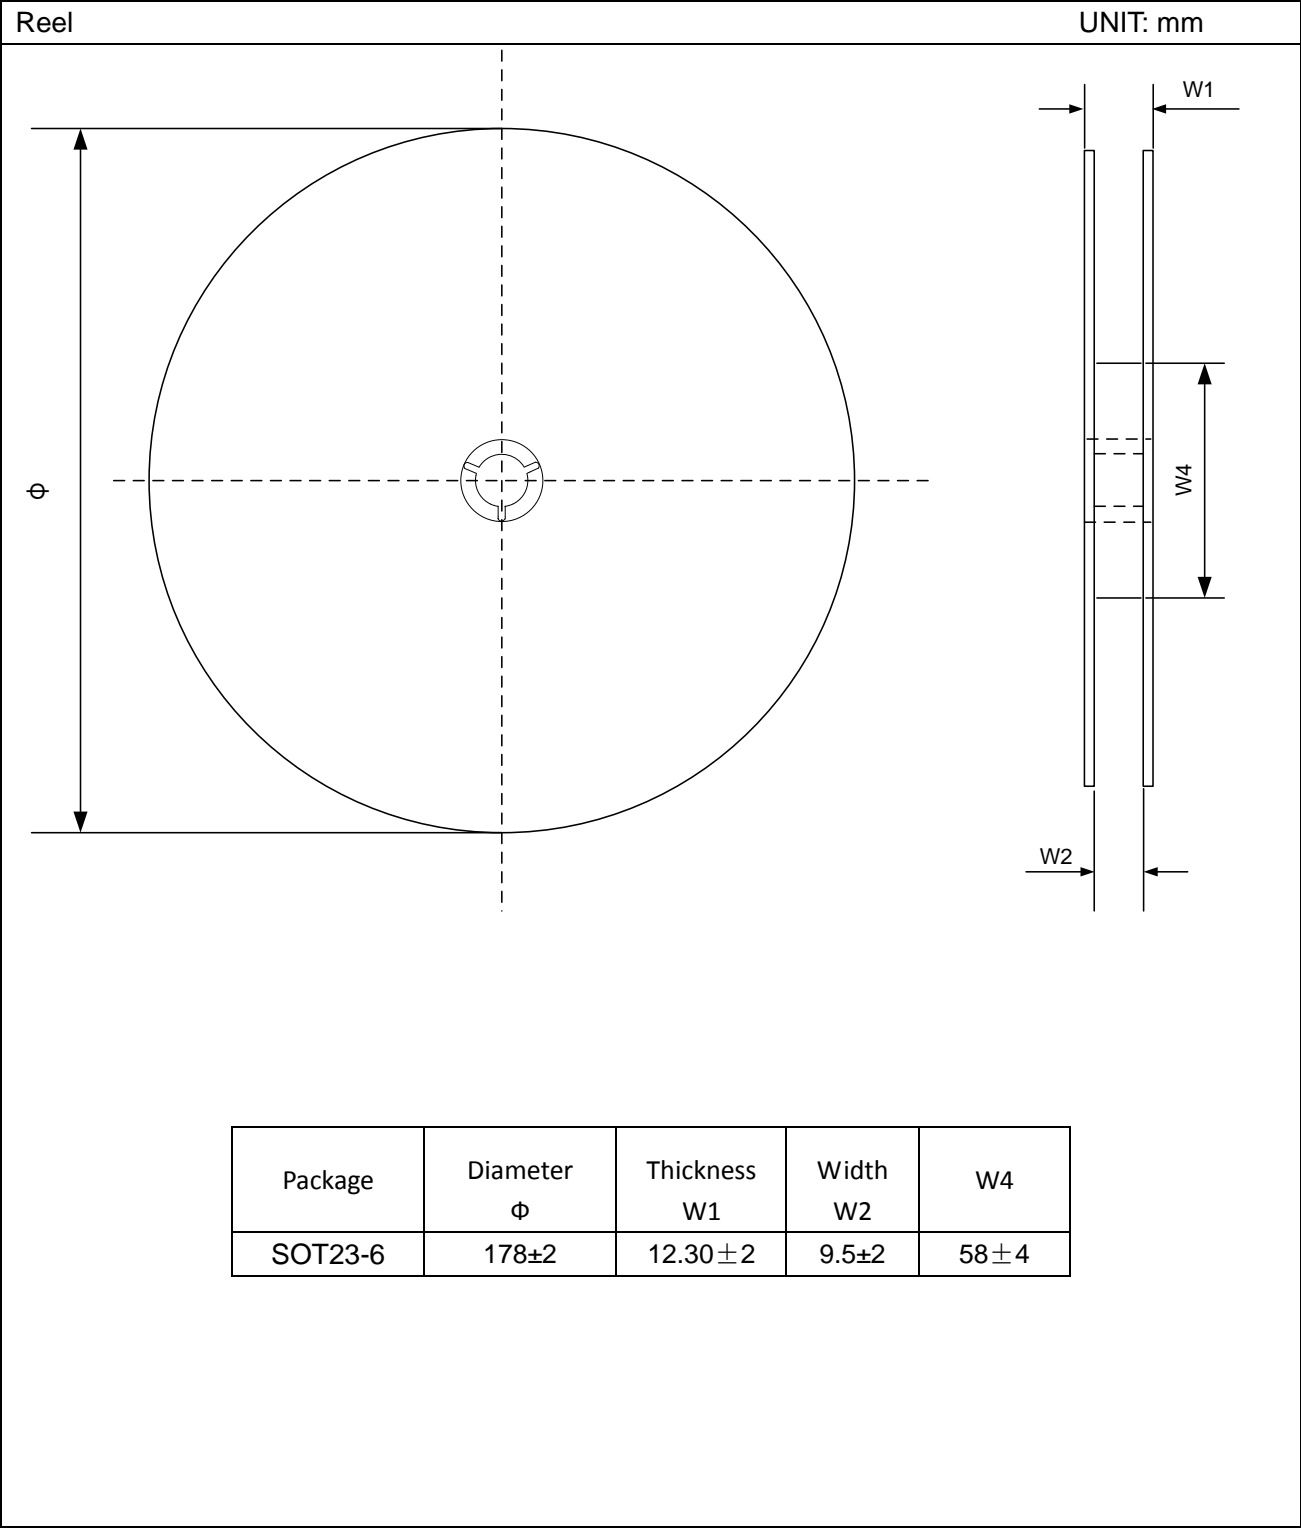

Carrier Tape


UNIT: mm

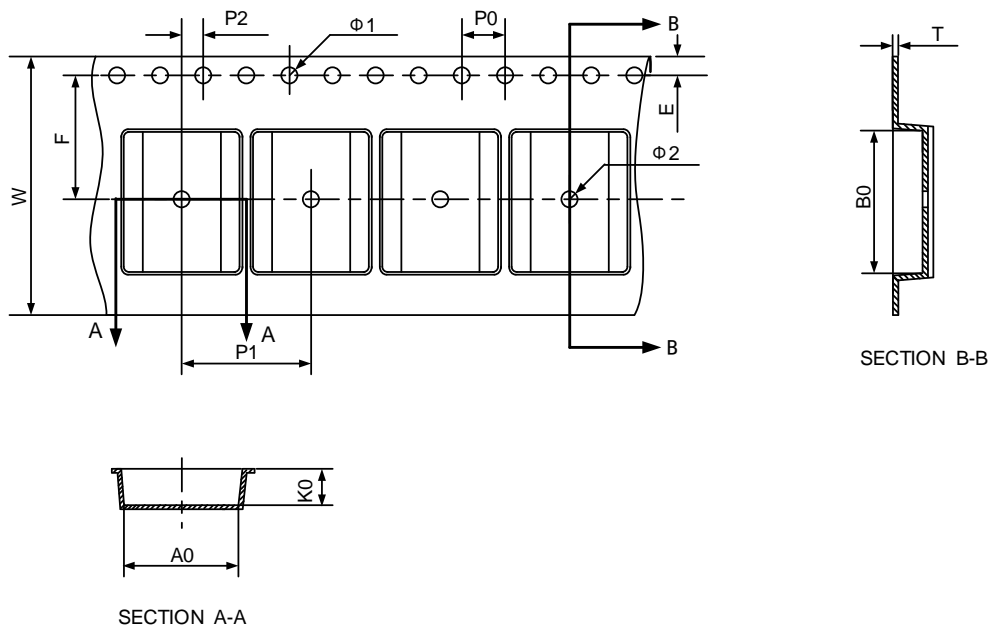

- Note :
- 1) The carrier type is black, and colorless transparent.
 - 2) Carrier camber is within 1mm in 100mm.
 - 3) 10 pocket hole pitch cumulative tolerance: ± 0.20 .
 - 4) All dimensions are in mm.

Package	Tape dimensions (mm)											
	P0	P2	P1	A0	B0	W	T	K0	$\Phi 1$	$\Phi 2$	E	F
SOT23-6	4.0±0.1	2.0±0.1	4.0±0.1	3.23±0.2	3.13±0.3	8.0±0.3	0.25±0.2	1.37±0.2	1.55±0.15	1.00min	1.75±0.1	3.50±0.1

PACKAGE OUTLINE

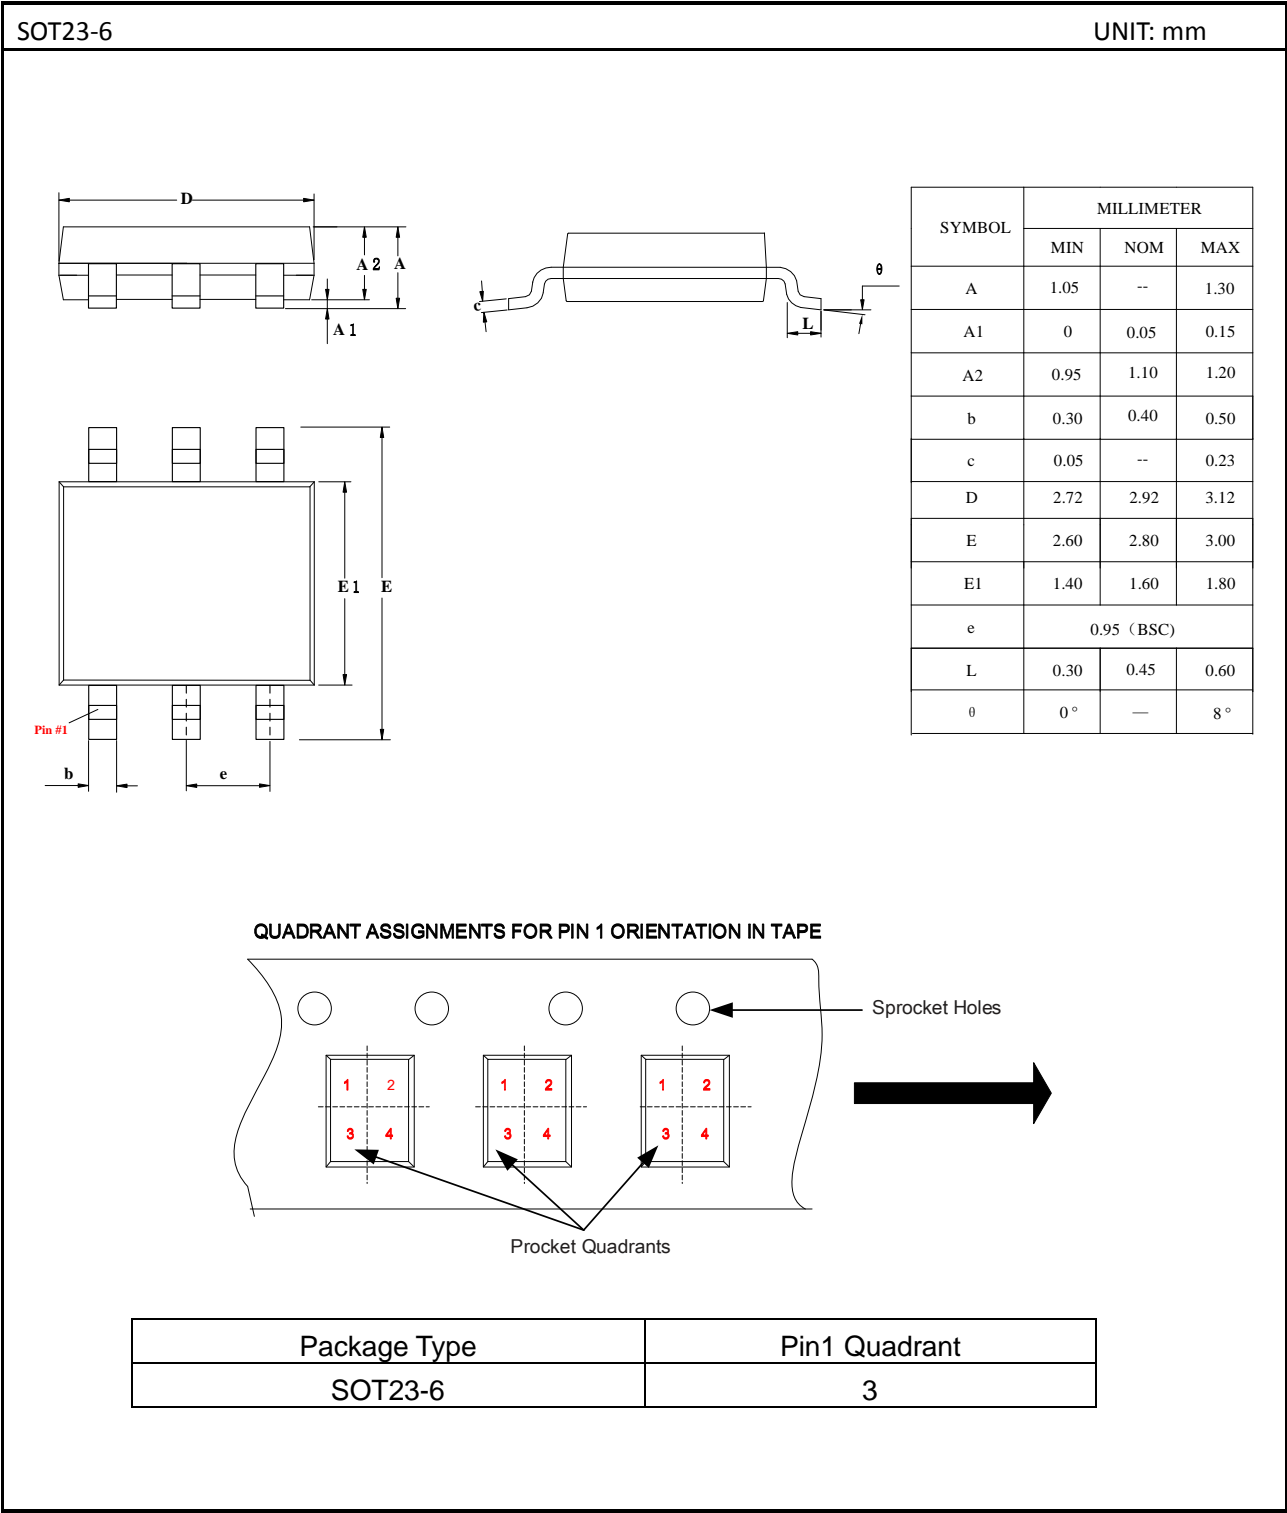

IMPORTANT NOTICE

- Joulwatt Technology Inc. reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein.
- Any unauthorized redistribution or copy of this document for any purpose is strictly forbidden.
- Joulwatt Technology Inc. does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Copyright © 2021 JW5359/JW5359M/JW5359F/JW5359FM Incorporated.

All rights are reserved by Joulwatt Technology Inc.